

## ►► Double security door TT2.2/WK3

### Completely made from stainless steel

**SSecurity class WK3 is recommended by the criminal investigation department if the building is additionally secured by means of a burglar alarm system.**

**Certified to security of DIN V ENV 1627, inspection level WK3. Applicable as access to buildings, especially in potable water supply, and for plants with increased security requirements..**

Security door, burglar and attack proof, certified to security of DIN V ENV 1627, inspection level WK3, ready for installation, double-leaved, double skinned fixable and swing leaf, completely made from 1.4301/1.4307 stainless steel (AISI 304), with double rubber seal. The door and frame close flush, the fixable and swing leaf opening to the outside (in escape direction)

Sound insulation: 34/29 dB.

Door, with injected CFCs-free polyurethane hard foam insulation, longitudinally ground surface finish, with rubber seal. Fastened to the frame with stable maintenance-free hinge plates. The door and frame close flush. The closed door engaging flush with the frame by means of solid anchor bolts engaging in the frame for four-point locking. Safety lock with austenitic manganese steel plate provided for profile half cylinder (which is not included in the supply contract; the profile cylinder to be DIN V 18252 – P2 – H – BZ), with anti-panic lock, i.e. the swing leaf can any time be opened from inside by operating the handle, even when locked. Protective stainless steel fitting, without cylinder cover, with a rigidly mounted handle and a red plastic button inside.

The fixable leaf is operated by means of a sliding locking bolt. The contact surface between the opening leaf and fixable leaf is rubber sealed.

Z-frame, three-sided, fabricated from special section, with inserted rubber seal, with step flashing. Including supply of the associated mounting material.

Frame and door shielded arc-welded and acid bath cleaned before washing, drying and surface passivation.

### Ordering options:

#### Frame / mounting:

- Z-frame
  - bolted with dowelling clips

- Stock frame
  - bolted with dowelling clips
- Stock frame
  - bolted through the frame



### Door opening options:

- Hinges on left
- Hinges on right

### Special accessories available on request:


- Surface finish (lacquer, copper covering, wooden panelling)
- One/two security ventilation louvre(s) size 500 x 300 mm
- Upper door closer
- One-part or two-part door arrestor
- 1.4571/1.4404 stainless steel
- Anti-graffiti lacquer
- Door heating (heating cable in frame and/or door surface)
- Lock for two side-by-side profile cylinders (that can be opened independently)
- Magnetic contact = door position indicator ('open' – 'closed')
- Lock-bolt contact or bolt position indicator ('open' – 'closed')
- Alarm system in door surface
- Block lock for alarm system
- Door lockable from inside with a second handle
- Steel sheet finish for exterior door surface for installations exposed to extreme sunlight
- Stainless steel rain protection rosette
- Stock frame insulation



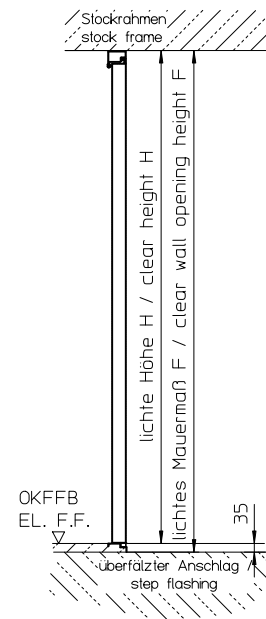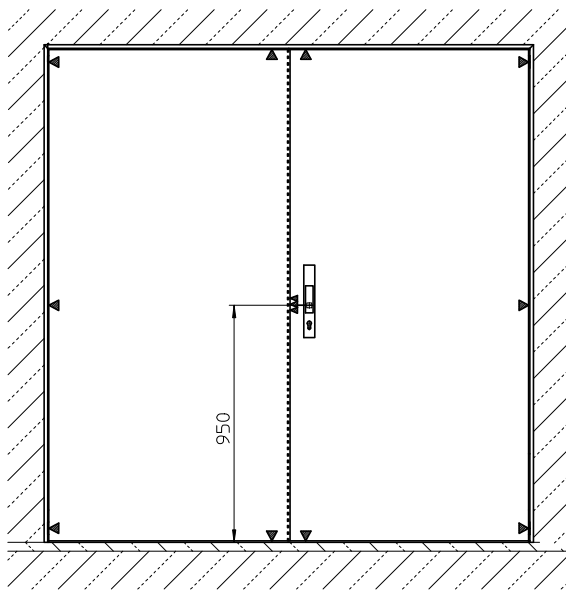

Stockrahmen  
 stock frame

Z-Zarge  
 Z-frame

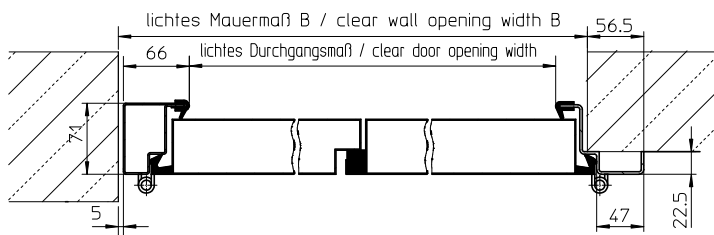

We manufacture to your specifications. Clear wall opening (F) = distance between bottom edge of lintel and top edge of unfinished floor  
 Clear height (H) = distance between bottom edge of lintel and top edge of finished floor

Installation place	clear width (B)	clear wall opening (F)	clear height (H)

## HUBER SE

Industriepark Erasbach A1 · D-92334 Berching  
 Phone: + 49 - 84 62 - 201 - 0 · Fax: + 49 - 84 62 - 201 - 810  
 info@huber.de · Internet: www.huber.de

Subject to technical modification  
 Drawing No. 190.162, 8.2010

Double security door TT2.2/WK3