

[Home](#) ■ [Products](#) ■ [Screens and Fine Screens](#) ■ [Perforated Plate and Bar Screens](#) ■ [HUBER Grab Screen TrashLift](#)

HUBER Grab Screen TrashLift



Cable operated coarse screen for:

- Protection of pumping station
- Seawater intake
- Surface water intake
- Sewage treatment plants

The HUBER Grab Screen TrashLift reliably removes bulky material with high operating reliability and can be easily retrofitted into existing channels.

Waste water is screened via a coarse bar screen / trash rack with the collected screenings being removed by a hoisted grab cleaner. The HUBER Grab Screen Trashlift is operated in a cyclical operation mode with the grab cleaner being mounted to two load ropes and one grab-control rope hoisted by a three winch system. Opening and closing of the grab cleaner is achieved by an independent winch. For an optimum discharge of the collected screenings a scraper automatically discharges the screenings and cleans out the grab cleaner.

Screen sizes:

- Screen width: up to 4,000 mm. Wider on request
- Discharge height above channel floor: up to 30 m. Deeper on request
- Bar spacings: ≥ 20 mm
- Installation angle: 70-90°

Materials:

- All parts in contact with medium (except the drive and bearings) are made of immersion pickled stainless steel
- Sea water application: All machine parts can be designed to fit necessary requirements

Benefits**The benefits of the HUBER Grab Screen TrashLift**


- Reliable removal of bulky material with high operating reliability
- Easy to retrofit into existing channels
- Installation without channel recesses possible
- High capacity grab with replacable rake teeth
- Two speed control of grab cleaner: Maximize screenings discharge capacity
- Optimum cable routing: Maximize cable lifetime
- Scraper and traversing grab at discharge position: Optimum screenings discharge

Downloads


[Brochure: HUBER Grab Screen TrashLift](#) [pdf, 303 KB]

Case Studies

- [HUBER extends its range of coarse screen systems with the HUBER Grab Screen TrashLift](#)

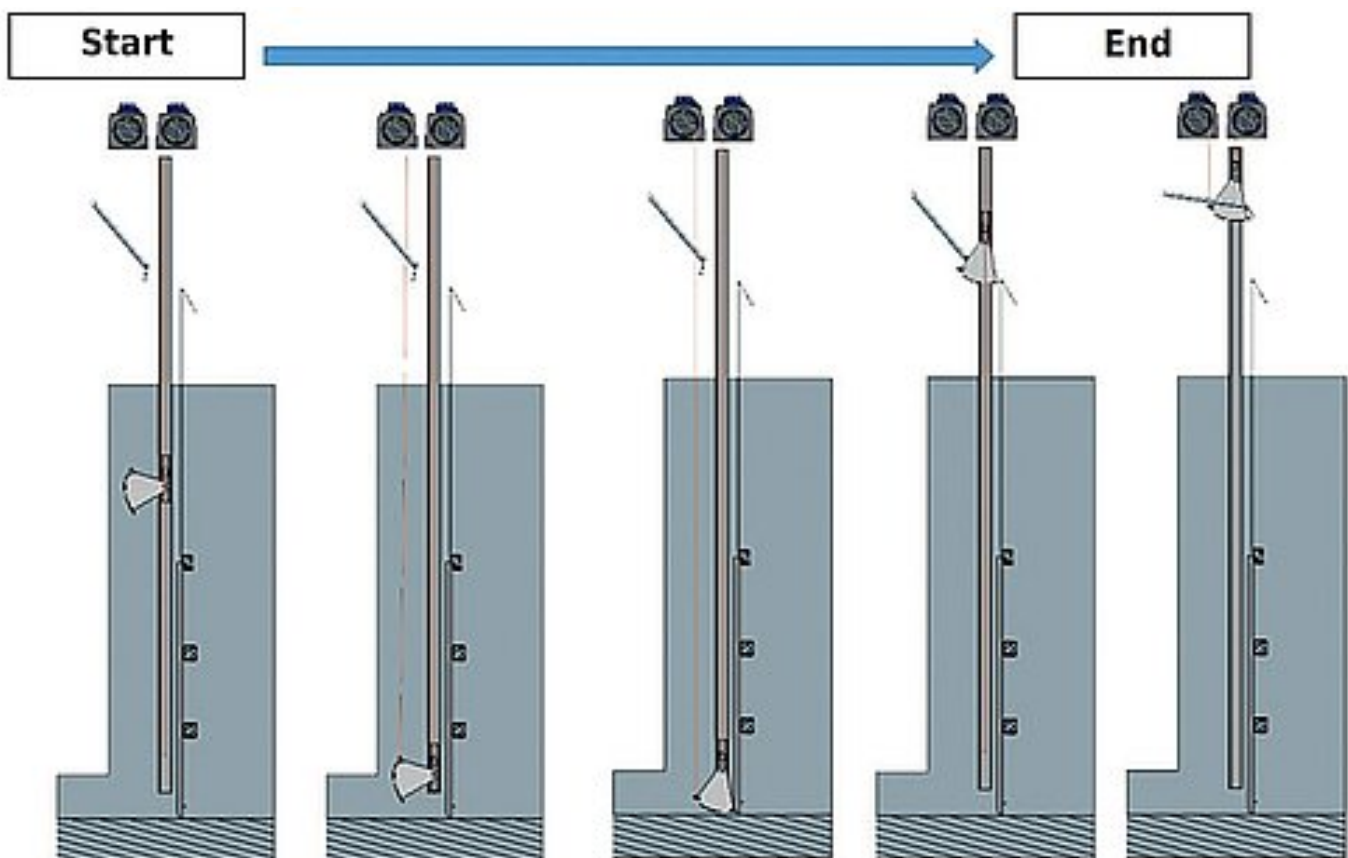Design sketch

Functional principal - motion flow

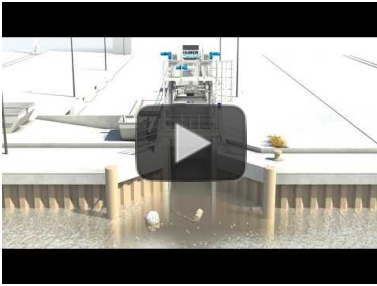

Animation: HUBER Grab Screen
TrashLift

<https://www.youtube.com/watch?v=l3gWq0fy52Y>

More products of this group: Perforated Plate and Bar Screens

- [HUBER Belt Screen EscaMax®](#)
- [HUBER Multi-Rake Bar Screen RakeMax®](#)
- [HUBER Multi-Rake Bar Screen RakeMax® HF \(high flow\)](#)
- [HUBER Multi-Rake Bar Screen RakeMax® CF](#)
- [HUBER Band Screen CenterMax®](#)
- [HUBER Coarse Screen TrashMax®](#)

Adresse / address: HUBER SE · Industriepark Erasbach A1 · 92334 Berching · Germany · Telefon / phone: + 49 - 84 62 - 201 - 0 · Fax / fax: + 49 - 84 62 - 201 - 810
e-mail: info@huber.de · Internet: <http://www.huber.de>

Sitz der Gesellschaft / Headquarters: Berching · AG Nürnberg / Register of companies: HRB 25558

Vorstand / Board: Georg Huber (Vorsitzender / CEO), Dr.-Ing. Oliver Rong (stellvertretender Vorsitzender / Vice CEO), Dr.-Ing. Johann Grienberger, Rainer Köhler
Aufsichtsratsvorsitzender / Chairman of the Supervisory Board: Alois Ponnath

USt (VAT)-IdNr.: DE 812353219

Bank: HypoVereinsbank Nürnberg (BLZ 760 200 70) 5 008 409 · SWIFT-BIC: HYVEDEMM460 · IBAN: DE 30 7602 0070 0005 0084 09

