

[Home](#) ■ [Products](#) ■ [Screens and Fine Screens](#) ■ [ROTAMAT® Screens](#)

HUBER Pumping Stations Screen ROTAMAT® RoK4



Automatically cleaned fine screen with vertical lifting, dewatering and compaction of screenings

- Prevents clogging and tressing in the pumping station
- Compact unit, easy to fit into confined spaces
- Dewatering and compaction of screenings
- Optional frost-protected unit for outdoor operation
- Sturdy, low-maintenance stainless steel design

The ROTAMAT® RoK4 screen is the ideal solution for pumping stations, whether for new structures or refurbishment. Contrary to conventional screening systems which require manual cleaning, the screen surface of the ROTAMAT® RoK 4 screen is cleaned automatically.

The RoK 4 screen vertically lifts the screenings, and dewateres and compacts them at the same time. The compacted screenings are discharged into a container or endless bagger for further disposal thus eliminating odour nuisance and pump failure due to clogging.

The screen consists of a vertical perforated screen basket and a shafted auger in a vertical tube. The wastewater flows through an inflow connection and a chamber into the screen basket. Within the screen basket the flights of the screw are equipped with wear-resistant brushes for effective cleaning of the screen. As the screenings are gradually elevated by the auger, they are dewatered. The compacted screenings are discharged into a container or endless bagging unit thus eliminating odour nuisance.

The screened wastewater flows off by gravity or is pumped to a higher level. The filtrate drains through a hose back into the inlet chamber. The top of the inflow chamber is open and serves as an emergency bypass so that the machine can be submerged without problems, e.g. in case of a power failure. The integrated bottom step prevents back-flooding into the sewer system and thus undesired deposits in the incoming sewer.

Benefits

HUBER PUMPING STATION SCREENS ROTAMAT® ROK4 OFFER OUTSTANDING ADVANTAGES:

- Automatic screening, lifting and compaction in a single compact unit
- Optimal solids retention by means of twodimensional screening (perforated plate)
- Prevent clogging and tressing in pump stations and manholes
- Integrated bottom step to prevent deposits in the incoming sewer
- Easy to install into existing structures
- Availability of completely submerging the screen


Downloads

 [Brochure: HUBER Pumping Stations Screen ROTAMAT® RoK4](#) [pdf, 1.09 MB]

Case Studies

- [HUBER wastewater treatment technology for the biggest factory of the milk processing company Berglandmilch in Austria](#)

Design Sketch

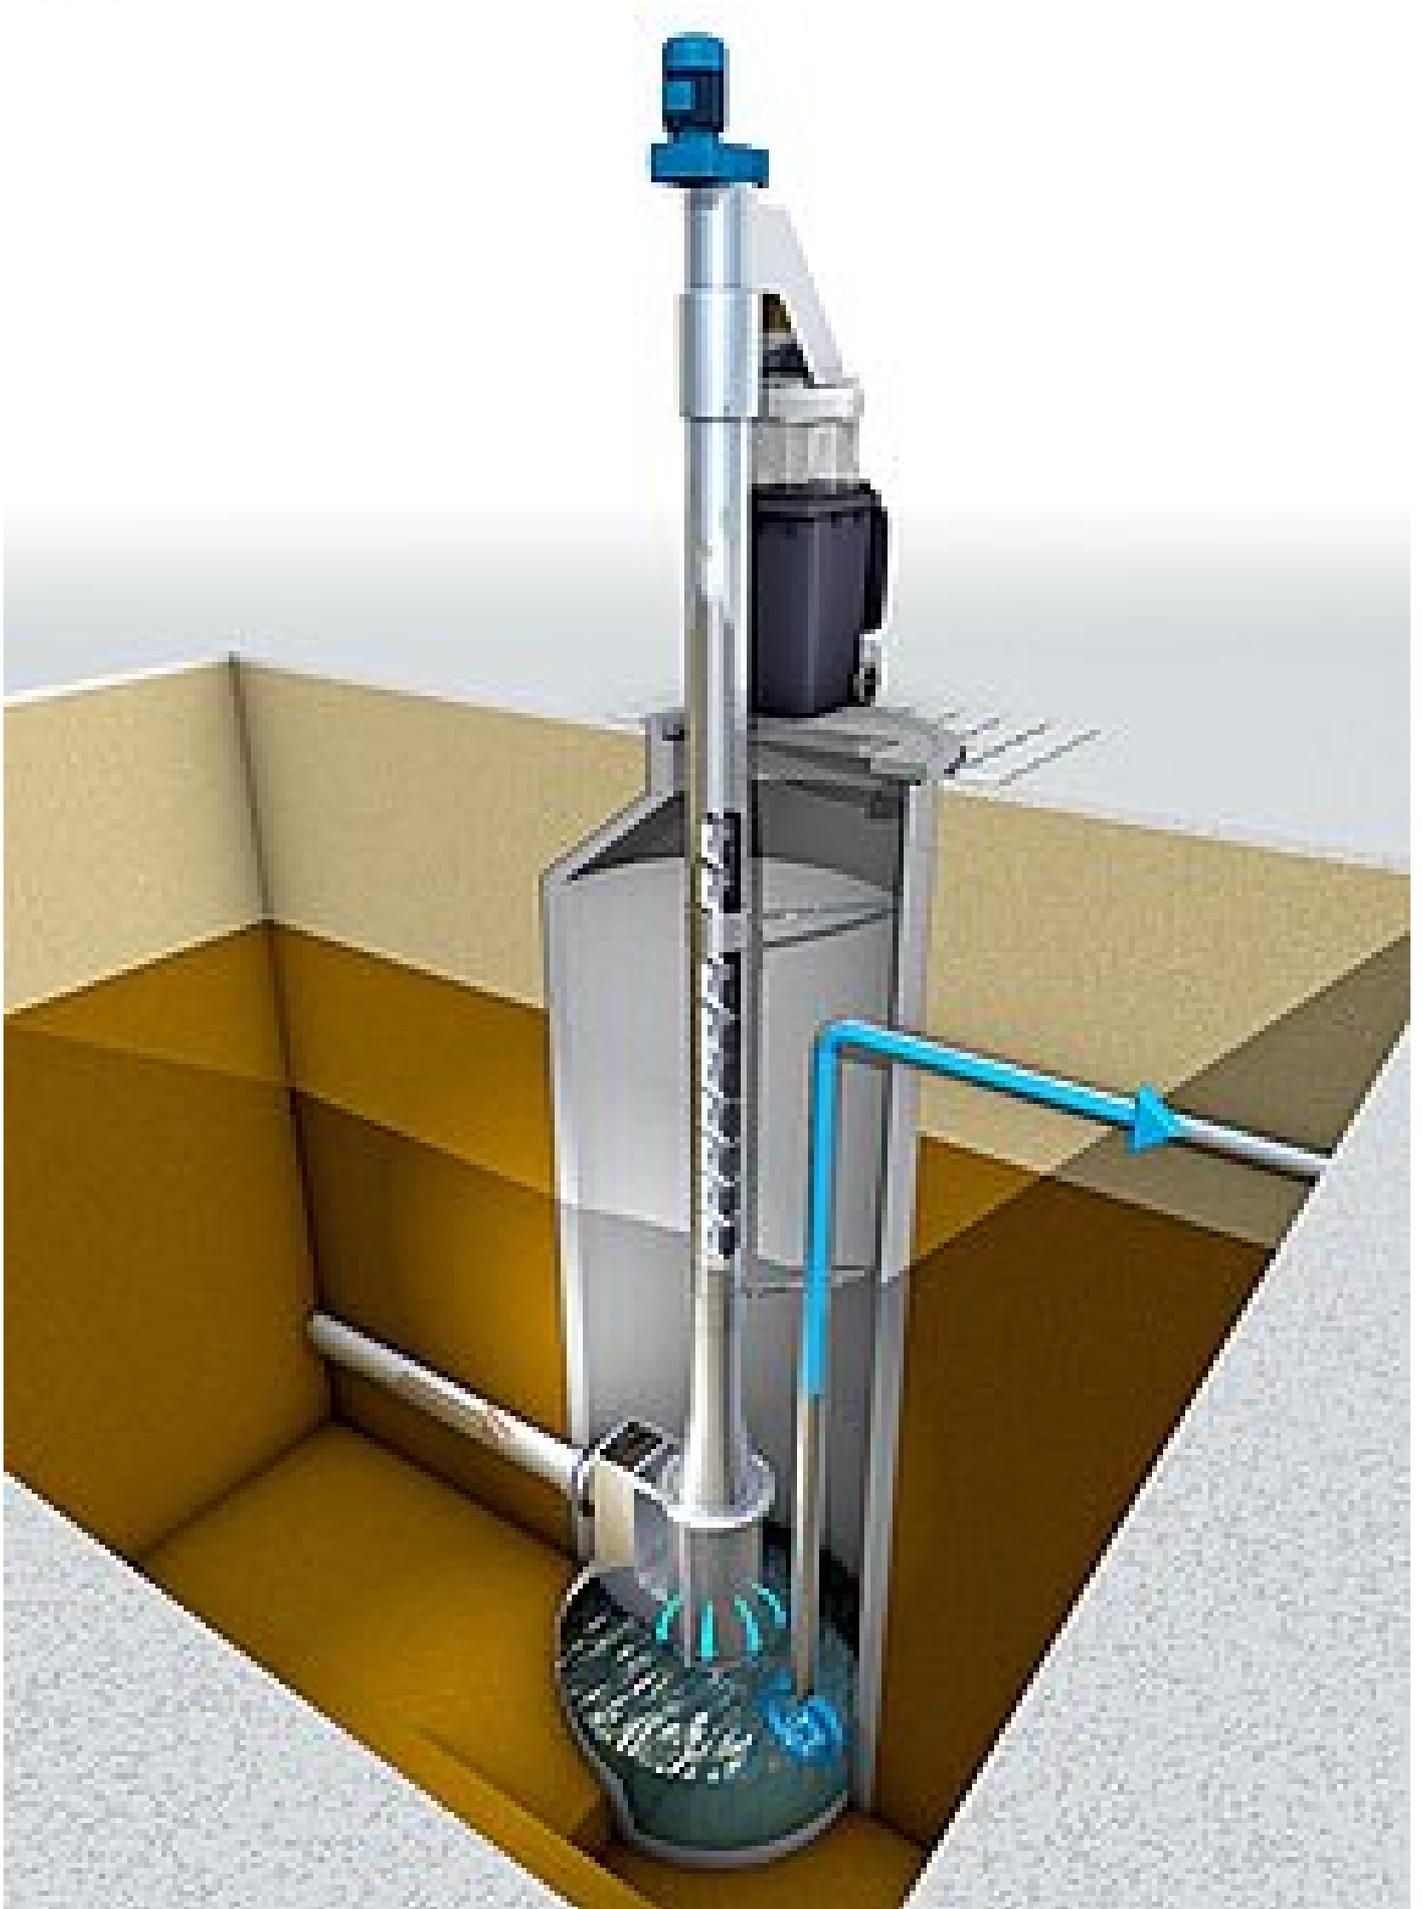

Media



Video: HUBER Pumping Stations
Screen ROTAMAT® RoK4 in a
HUBER ThermWin® Solution

<https://www.youtube.com/watch?v=tmifKb2QhLk>

More products of this group: ROTAMAT® Screens

- HUBER Fine Screen ROTAMAT® Ro1
- HUBER Rotary Drum Fine Screen / Perforated Plate Screen - ROTAMAT® Ro2 / RPPS / STAR
- HUBER Micro Strainer ROTAMAT® Ro9
- HUBER Complete Plant ROTAMAT® Ro5
- HUBER Complete Plant Hydro Duct ROTAMAT® Ro5 HD
- HUBER Coanda Complete Plant ROTAMAT® Ro5 C
- HUBER Membrane Screen ROTAMAT® RoMem

Adresse / address: HUBER SE · Industriepark Erasbach A1 · 92334 Berching · Germany · Telefon / phone: + 49 - 84 62 - 201 - 0 · Fax / fax: + 49 - 84 62 - 201 - 810
e-mail: info@huber.de · Internet: <http://www.huber.de>

Sitz der Gesellschaft / Headquarters: Berching · AG Nürnberg / Register of companies: HRB 25558
Vorstand / Board: Georg Huber (Vorsitzender / CEO), Dr.-Ing. Oliver Rong (stellvertretender Vorsitzender / Vice CEO), Dr.-Ing. Johann Grienberger, Rainer Köhler
Aufsichtsratsvorsitzender / Chairman of the Supervisory Board: Alois Ponnath

USt (VAT)-IdNr.: DE 812353219

Bank: HypoVereinsbank Nürnberg (BLZ 760 200 70) 5 008 409 · SWIFT-BIC: HYVEDEMM460 · IBAN: DE 30 7602 0070 0005 0084 09

