

[Home](#) ■ [Solutions](#) ■ [Sludge Treatment](#) ■ [Sludge Drying](#) ■ [Solar and Regenerative Drying](#)

Sludge Drying with Solar and Renewable Energy


The [HUBER Solar-Regenerative Sludge Dryer SRT](#) is able to meet the most different specific customer requirements, whether as a pure solar dryer or all-year-round dryer operated with additional heat. Also the automation degree of sewage sludge feeding and removal is variable.

The combined sludge turning and transporting system is at the heart of the drying plant. The sludge is transported through the hall virtually continuously or as an option in batches. With its double shovel the turning/transporting unit can not only aerate, break up and move the sludge through continuous shovelling but also achieve a controlled distribution of sludge in its shovels. Due to the latter function of the shovel sludge can be back-mixed or sludge feeding and removal take place at the same hall side.

The dryer consists of a transparent thermo shell in which the HUBER Sludge Turner SOLSTICE® distributes the sludge all over the area. The air and sludge bed are heated by solar radiation. In addition heat (for example at 50° C) can be added via floor heating. Heat input via heating coils is also possible (usually with temperatures above 70° C). External heating can be operated with exhaust heat from a block heat and power plant or by means of a heat pump which uses the heat contained within wastewater (WWTP effluent). (See also [HUBER Solution Sludge Drying with Wastewater Heat](#))

If an additional external heat is used, space requirements are smaller compared to pure solar drying and plant operation is possible all year round even in areas offering only moderate or rare solar radiation.

Systems concept

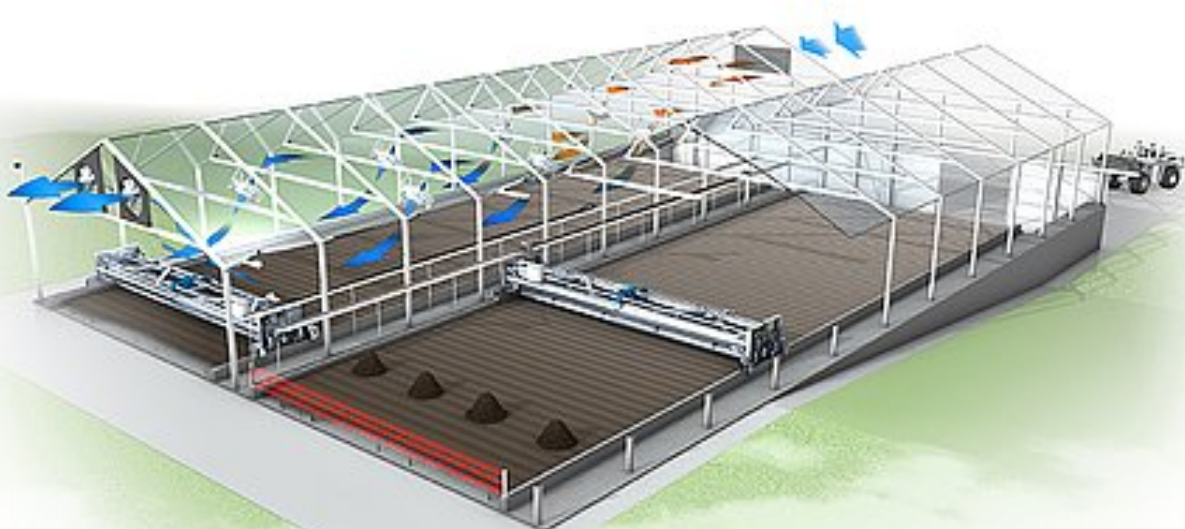

Design sketch: Sludge drying with solar energy

Process

SYSTEM DESCRIPTION

The liquid sludge can be pre-dewatered in our [HUBER Screw Press Q-PRESS®](#). Sludge feeding can for example be accomplished by means of a screw that distributes the dewatered sludge cake at one gable side over the full width of the thermo shell. The special HUBER sludge turner [SOLSTICE®](#) travels on tracks. While continuously being restacked by the turner, the sludge on the floor is slowly transported to the other end of the hall. On its way through the hall, the sludge is being dried by solar radiation. As an option, heat can be added via a floor heating. The dried material has a solids content of at least 65% and can be discharged into a container by means of a [ROTAMAT® Screw Conveyor](#).

Where no, or not sufficient heat is available, we withdraw heat from treated wastewater (See also our HUBER Solution [Sludge Drying with Wastewater Heat](#)).

Case Studies

- [Solar HUBER dryer stops rising costs for sludge disposal](#)
- [From thin sludge to dry granulate – all from one source](#)
- [New safety system for the HUBER Sludge Turner SOLSTICE®](#)
- [Research and development in the field of solar sludge drying](#)
- [Largest solar sewage sludge drying site in Southern Germany fully equipped by HUBER](#)
- [HUBER Solar Sludge Dryer SRT – unique in variability of sludge feeding and removal](#)
- [HUBER Solar Active Dryers offer sustainable technology for maximum drying performance](#)
- [Cold weather cannot stop the HUBER Solar Dryer SRT](#)
- [Solar dryers are in demand worldwide even for big and medium-sized wastewater treatment plants](#)
- [Solar sewage sludge drying – a reasonable solution if based on intelligent and sustainable design](#)
- [HUBER installs its first combined solar and regenerative sewage sludge drying project](#)


Benefits

ADVANTAGES OF SLUDGE DRYING WITH SOLAR AND REGENERATIVE ENERGY


- Dry, granular and safe to handle product with over 65 % solids content
- Moderate drying temperature - no odour nuisance
- Little dust generation - safe operation
- Use of solar energy and low-temperature (waste) heat
- Independent of season and climate
- Small footprint
- Low operation and maintenance costs

Media



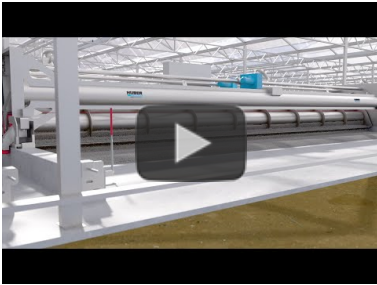

Animation: HUBER Sludge Turner SOLSTICE® for large quantities of sludge
<https://www.youtube.com/watch?v=T-FUbjSzMZE>

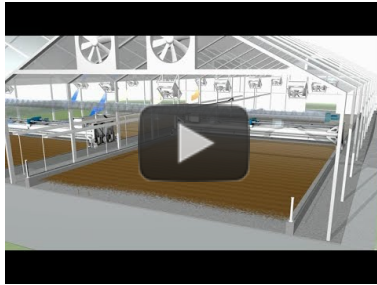


Animation: HUBER Sludge Turner SOLSTICE®
<https://www.youtube.com/watch?v=gOkKQhmA4uM>



Video: HUBER Sludge Turner SOLSTICE®
<https://www.youtube.com/watch?v=QdWhhrCOkug>



Video: Solar Active Dryer SRT at STP Gunstett
<https://www.youtube.com/watch?v=JqflpsD16VM>

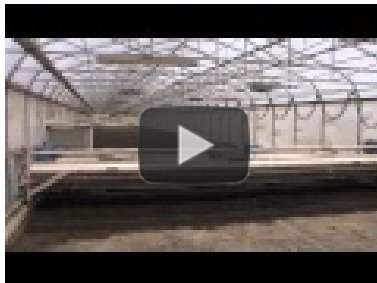

Video: Solar Active Dryer SRT at STP Marktbergl
<https://www.youtube.com/watch?v=Zajln8OGxpk>

Products

- [HUBER Solar Active Dryer SRT](#)
- [HUBER Screw Press Q-PRESS®](#)
- [HUBER Screw Conveyor Ro8 / Ro8 T](#)

Adresse / address: HUBER SE · Industriepark Erasbach A1 · 92334 Berching · Germany · Telefon / phone: + 49 - 84 62 - 201 - 0 · Fax / fax: + 49 - 84 62 - 201 - 810
 e-mail: info@huber.de · Internet: <http://www.huber.de>

Sitz der Gesellschaft / Headquarters: Berching · AG Nürnberg / Register of companies: HRB 25558
 Vorstand / Board: Georg Huber (Vorsitzender / CEO), Dr.-Ing. Oliver Rong (stellvertretender Vorsitzender / Vice CEO), Dr.-Ing. Johann Grienberger, Rainer Köhler
 Aufsichtsratsvorsitzender / Chairman of the Supervisory Board: Alois Ponnath

USt (VAT)-IdNr.: DE 812353219
 Bank: HypoVereinsbank Nürnberg (BLZ 760 200 70) 5 008 409 · SWIFT-BIC: HYVEDEMM460 · IBAN: DE 30 7602 0070 0005 0084 09

